



# **EASYLAM 160 TW**

## finishing, cutting, laminating

Professional laminator with heatable upper roller up to 55°C.

- Motor-assisted raising and lowering of the rollers with automatic pressure.
- Temperature settings in 5 steps for optimal finishing.
- Consumption display of the laminate up to 50m allows a convenient overview.
- Two functions in one unit, one side laminator and one side cross cutter.


article	Item no.
EASYLAM 160TW with EASYTRIM	26219
EASYLAM 160TW without EASYTRIM	26218



### Technical data

Speed: up to 9.9m/min  
Control: foot pedal/switch  
max. material thickness: 30mm  
temperature: 40°, 45°, 50°, 55°C  
Media length measurement: up to 50m  
Laminating width: 1.640mm  
Diameter of Silicone rollers: 120 mm

The machine is delivered in a wooden box.  
Dimensions: 216 x 162 x 72 cm  
weight: 250kg with trimmer, 240kg without trimmer  
Total weight incl. wooden packaging kg: 410 kg

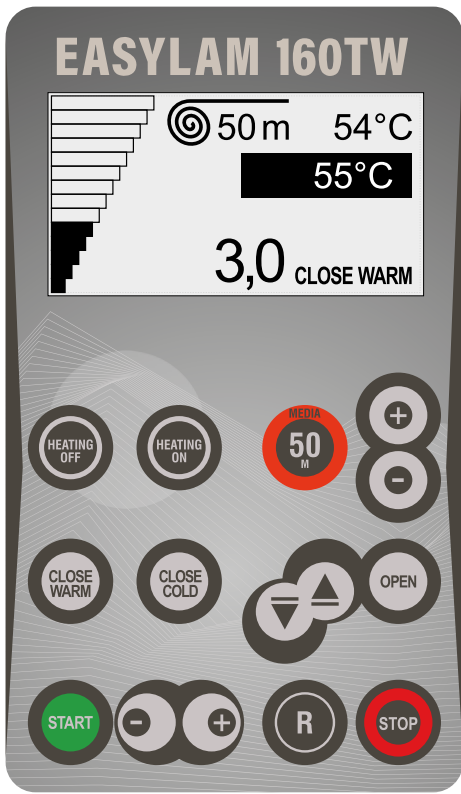

Simple operation through intuitive keyboard.



Brakes and slip clutches for all axles



Ergonomic rotary knobs



Drive via bolt-groove connection




Roll to roll lamination



Separate receptacle for APP film

## The integrated EASYTRIM on the rear side

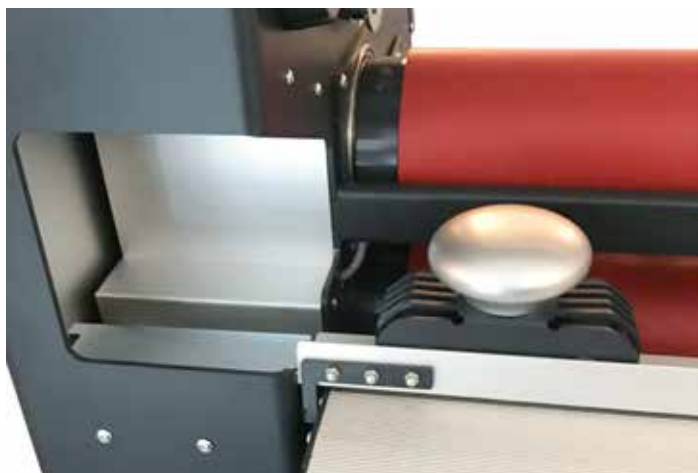


Cross cutting function for prints up to 165 cm.

Space-saving in the laminator housed.

The cutting table can be activated or the cutting table can be activated or parked with gas struts.

Two devices in one.

Parking station for the roller blade on the left and right.

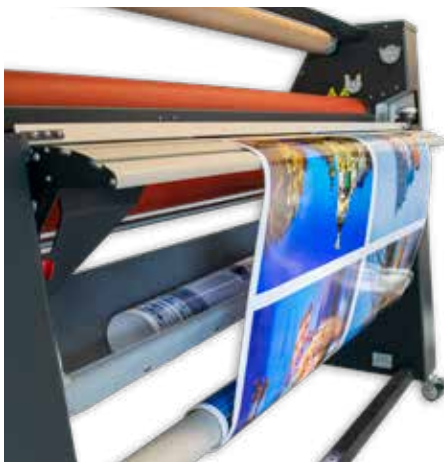

 **DATAPLOT**  
SINCE 1979

Dataplot GmbH  
Gutenbergstrasse 15  
D-24558 Henstedt-Ulzburg

Phone:  
+49 4193-9950  
Fax:  
+49 4193-995220  
E-mail:  
info@dataplot.de  
Web:  
www.dataplot.de

The EASYTRIM - cross cutter can also be retrofitted can also be retrofitted to machines (article number 26218) that were not originally equipped with it.